


Pocket Soft-Close Steel 213 ENG


NB! Only for aftermarket use in Norway



Soft-Close damper

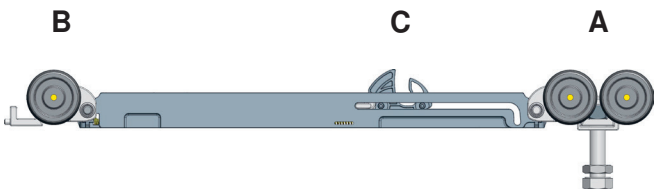


Activator

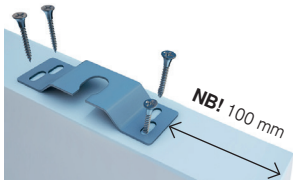

Step 0: The hanger bracket on the locking end of door leaf, must be fastened to the door leaf 100 mm from the edge of the door leaf, use 4 pcs of 30 mm screws, on each hanger bracket. Make sure that brackets are in center of the door leaf.



Step 1: Any screws inside the sliding door frame running track that are positioned where the activator have to be placed, must be removed before mounting the activator. **After sliding in the activator, the last/end screw (X) must be re-installed.**

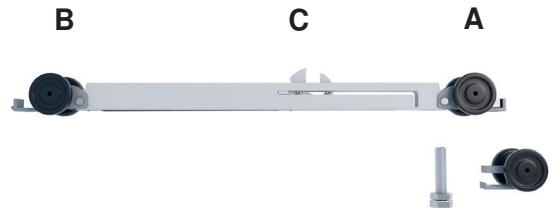

Step 2: Dismantle the damper by unscrewing bolt A and removing the extra wheelset!



Step 3: Insert dismantled damper into sliding rail - insert side B first. Make sure that nut is in place on side A.



Step 4: Insert support wheel A (make sure that nut is in place) - click in place on main wheel A. Lock in place with bolt A.



Step 5: The Soft-Close system should now look as picture above. Locking pin: Insert and lock in place as shown above. Mount sliding door as normal.




Step 6: Insert and fasten activator as shown - adjust by changing activator position. **NB! Check that screw (X), Step 1, have been re-installed!**



Produsert av:
Scanflex AS
Postboks 155
N-4795 Birkeland
Norway

Telefon +47 37 28 00 00
Faks +47 37 28 00 10
post@scanflex.no
www.scanflex.no

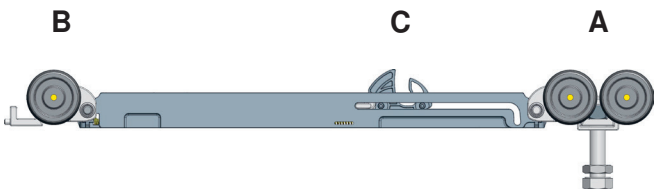


Soft-Close damper



Activator

**Step 1:**

If any screws have been used when mounting the sliding door frame and if these have been placed inside the running track, where the activator have to be positioned – these screws have to be removed or re-positioned before mounting the activator.

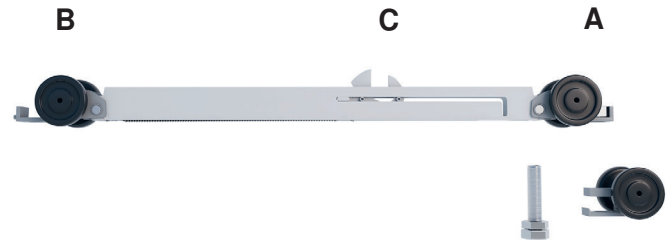**Step 2:**

Dismantle the damper by unscrewing bolt A and removing the extra wheelset!

**Step 3:**

Insert dismantled damper into sliding rail - insert side B first. Make sure that nut is in place on side A.

**Step 4:**

Insert support wheel A (make sure that nut is in place) - click in place on main wheel A. Lock in place with bolt A.

**Step 5:**

The Soft-Close system should now look as picture above. Locking pin: Insert and lock in place as shown above. Mount sliding door as normal.

**Step 6:**

Insert and fasten activator as shown - adjust by changing activator position.



Produsert av:
Scanflex AS
Postboks 155
N-4795 Birkeland
Norway

Telefon +47 37 28 00 00
Faks +47 37 28 00 10
post@scanflex.no
www.scanflex.no